


Antena HF móvil 10-80 mts. modelo OUTBACK-1899

HF mobile antenna 10-80 mts. model OUTBACK-1899

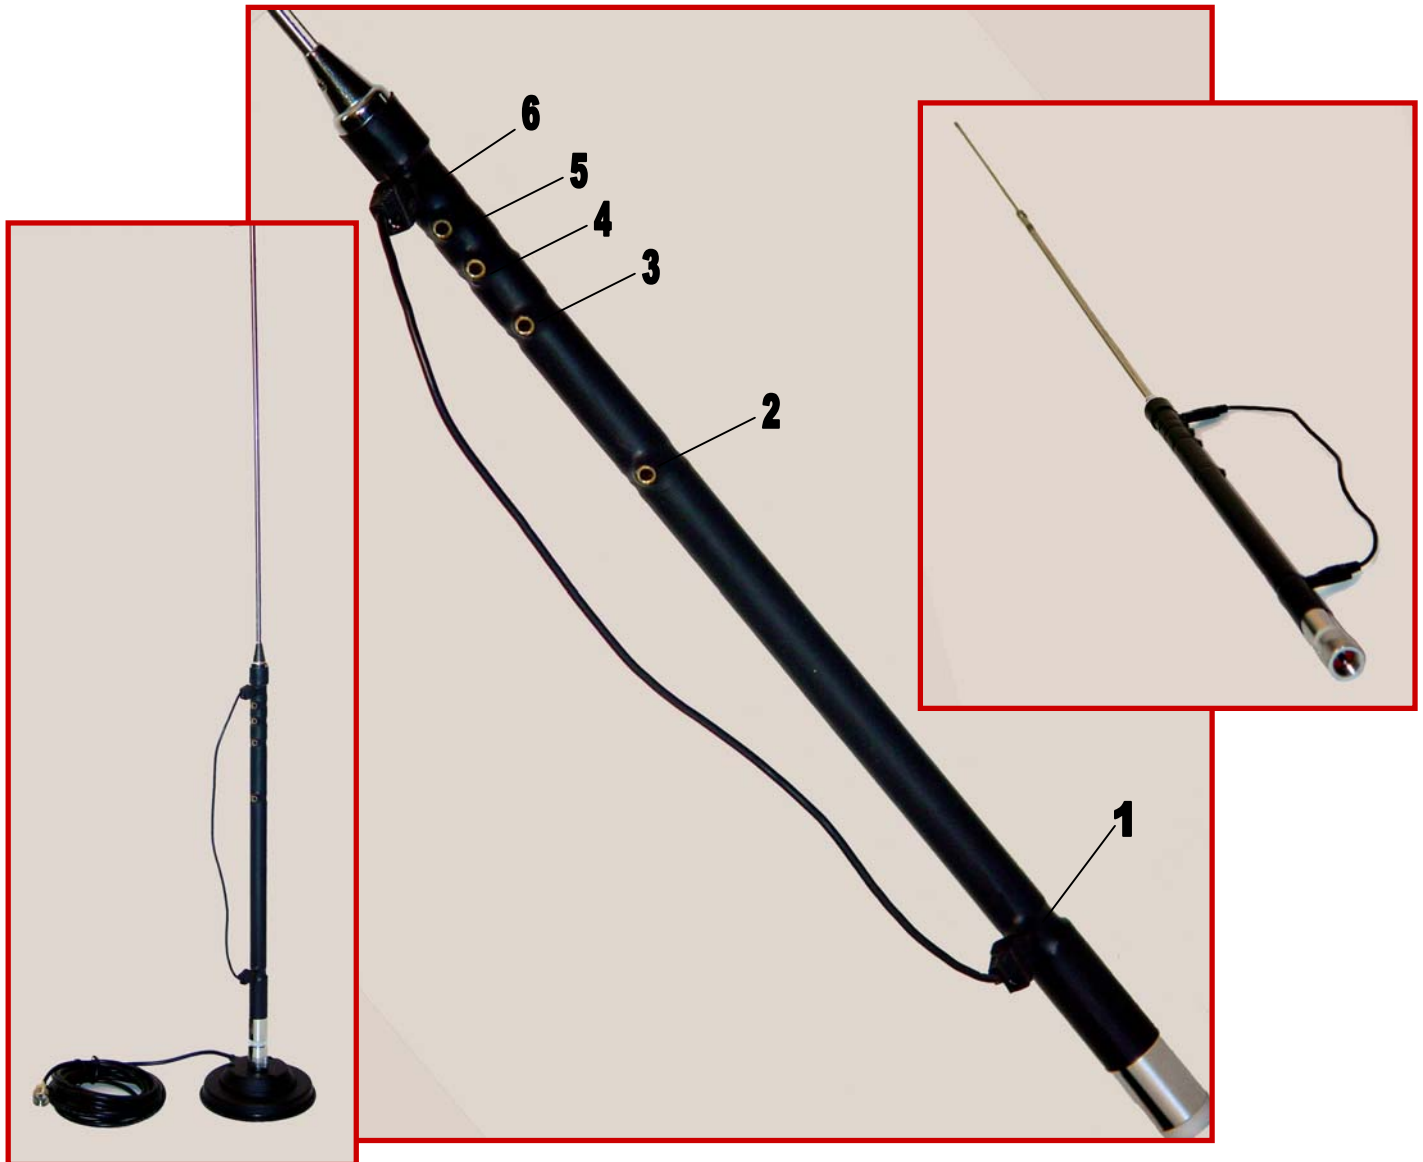

-Potencia
-Conector

Power:
Connector:

120 W
PL

| Conexiones / Connections | -Centro de banda / Center band | R.O.E. / S.W.R. | Altura de ajuste a centro banda / Center band height adjustment |
|-----------------------------------|---------------------------------------|------------------------|------------------------------------------------------------------------|
| 80 mts. Sin conectar / NC | 3.56 Mhz | 1.6 | 124.46 cm. |
| 40 mts. N°1 conectado al / to N°2 | 7.05 Mhz | 2.0 | 129.54 cm. |
| 20 mts. N°2 conectado al / to N°3 | 14.20 Mhz | 1.26 | 111.76 cm. |
| 15 mts. N°3 conectado al / to N°4 | 21.10 Mhz | 1.30 | 113.03 cm. |
| 10 mts. N°4 conectado al / to N°5 | 29.00 Mhz | 1.06 | 124.46 cm. |

Con el N°1 conectado al N°6 dispondremos de 5/8 en la banda de 2 mts. con ajuste a 114.3 cm. y de 5/8 en banda aerea 118/136 Mhz ajustando a 127 cm. de alto.

With Nr.1 connected to Nr.6 will also make 5/8 wave on 2 mtr. with 114.3 cm height adjustment and airband 118 / 136 Mhz with 127 cm. height adjustment.